



Icicles LED e Incandescentes Icicles LED i Incandescents

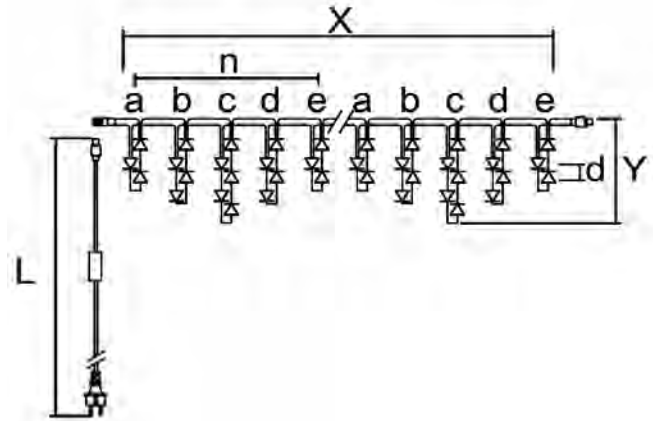

Ref	Lámpara Làmpada	Y(m)	X(m)	Aislante Aïllament	Lineas Línies	Luces/linea Llums/Linia	Total Total	Conex. Máx Connex. Màx	Pot(W) Pot(W)	
ibi05w	incand.	0,50	5,00	○ Goma	50	190	190	4	240	
ibi05wl	led	0,50	5,00	○ Goma	50	190	190	5	60	
ibi05bl	led	0,50	5,00	○ Goma	50	190	190	5	60	
avi4wl	led	1,0	5,0	○ Goma	50	190	190	8	24	
avi4bl	led	1,0	5,0	○ Goma	50	190	190	8	24	
avi4wwl	led	1,0	5,0	○ Goma	50	190	190	8	24	
avi4w	incand.	1,0	5,0	○ Goma	50	190	190	8	84	
ibi04w	incand.	1,00	4,00	○ Goma	40	304	304	3	360	
ibi04wl	led	1,00	4,00	○ Goma	40	304	304	5	100	
ibi04bl	led	1,00	4,00	○ Goma	40	304	304	5	100	
ibi04wwl	led	1,00	4,00	○ Goma	40	304	304	5	100	

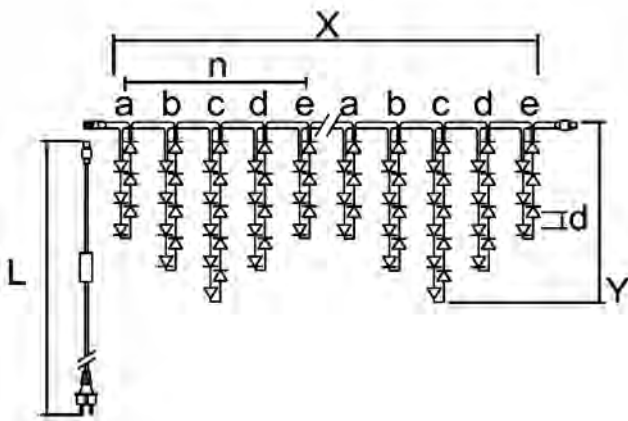

Montaje al aire a favor de gravedad (Foto: prov. Girona)
Muntatge a l'aire a favor de gravetat (Foto: prov. Girona)

Montaje al aire recogido (Foto: prov Girona)
Muntatge a l'aire recollit (Foto: prov Girona)